

ProLight PB2D-5JLA-Ux
5W UV Power LED
Technical Datasheet
Version: 1.6

ProLight Opto PB2D Series

Features

- Best thermal material solution of the world
- Best Moisture Sensitivity: JEDEC Level 1
- RoHS compliant
- Quartz Glass Lens
- View angle 30°


Main Applications

- UV gluing, UV curing, UV marking
- UV drying of printing inks and lacquers
- Currency inspection
- Forensic analysis - urine, protein stains
- Leak detection using fluorescent dyes
- Detects fluorescing minerals and gems

Introduction

- ProLight PB2D-5JLA-viewing angle 30° Quartz Package, is one of the smallest high power LED footprint available by ProLight Opto, has offered extended solid-state lighting design possibilities. ProLight PB2D-5JLA-viewing angle 30° is designed with ProLight own Patents and using copper leadframe, the best thermal material of the world.
- PB2D-5JLA-viewing angle 30° qualifies as the JEDEC Level 1 MSL sensitivity level and suitable for SMD process, Pb_free reflow soldering capability, and full compliance with EU Reduction of Hazardous Substances (RoHS) legislation.

Emitter Mechanical Dimensions

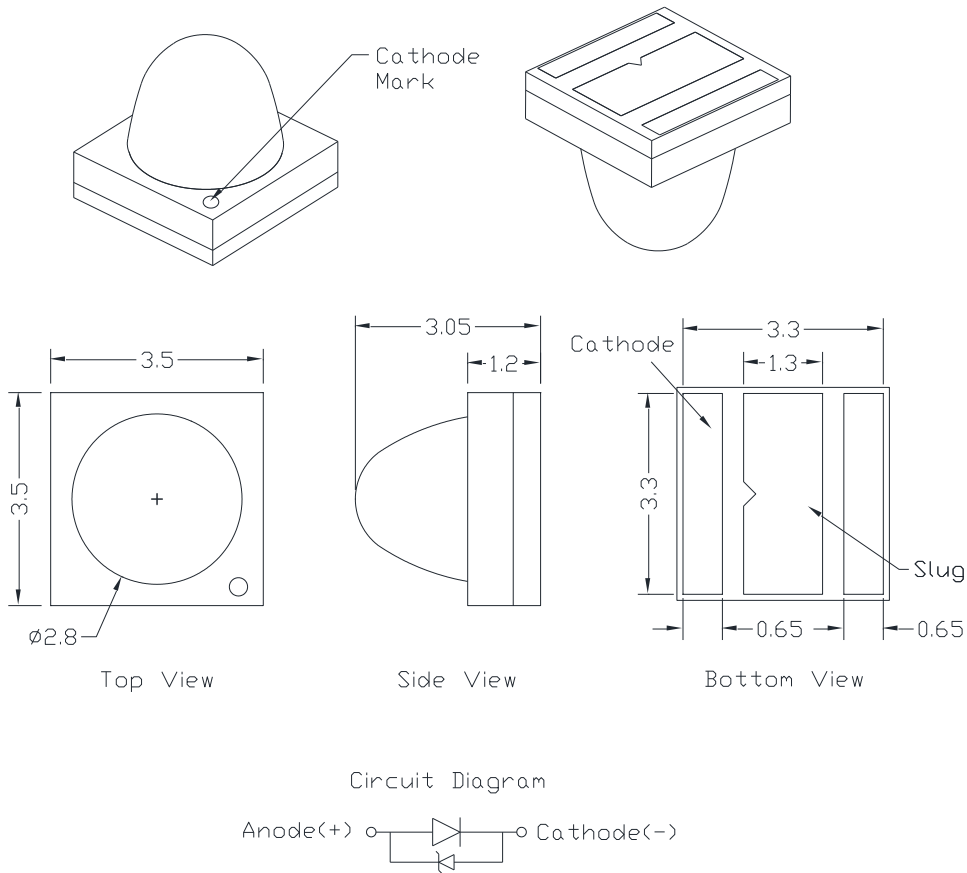

Notes:

1. The cathode side of the device is denoted by the chamfer on the part body.
2. Electrical insulation between the case and the board is required. Do not electrically connect either the anode or cathode to the slug.
3. Drawing not to scale.
4. All dimensions are in millimeters.
5. Unless otherwise indicated, tolerances are ± 0.10 mm.
6. Please do not solder the emitter by manual hand soldering, otherwise it will damage the emitter.
7. **Please do not use a force of over 3kgf impact or pressure on the lens of the LED, otherwise it will cause a catastrophic failure.**

*The appearance and specifications of the product may be modified for improvement without notice.

Flux Characteristics, $T_j = 25^\circ\text{C}$

| Radiation Pattern | Color | Part Number Emitter | Radiometric Power (mW) | | | |
|-------------------|-------|------------------------|------------------------|------|---------------|---------------|
| | | | @700mA | | Refer @1000mA | Refer @1500mA |
| | | | Min. | Typ. | Typ. | Typ. |
| Lambertian | UV-S | PB2D-5JLA-US | 755 | 870 | 1160 | - |
| | UV-M | PB2D-5JLA-UM | 910 | 1150 | - | 2220 |
| | UV | PB2D-5JLA-U | 910 | 1150 | - | 2220 |
| | UV-L | PB2D-5JLA-UL | 910 | 1150 | - | 2220 |

- ProLight maintains a tolerance of $\pm 10\%$ on flux and power measurements.
- Please do not drive at rated current more than 1 second without proper heat sink.

Electrical Characteristics, $T_j = 25^\circ\text{C}$

| Color | Forward Voltage V_F (V) | | | | | Thermal Resistance Junction to Slug ($^\circ\text{C}/\text{W}$) |
|-------|---------------------------|------|------|---------------|---------------|---|
| | @700mA | | | Refer @1000mA | Refer @1500mA | |
| | Min. | Typ. | Max. | Typ. | Typ. | |
| UV-S | 3.40 | 3.60 | 4.00 | 3.65 | - | 5 |
| UV-M | 3.20 | 3.55 | 4.00 | - | 3.75 | 5 |
| UV | 3.20 | 3.55 | 4.00 | - | 3.75 | 5 |
| UV-L | 3.20 | 3.55 | 4.00 | - | 3.75 | 5 |

- ProLight maintains a tolerance of $\pm 0.1\text{V}$ for Voltage measurements.

Optical Characteristics at 700mA, $T_j = 25^\circ\text{C}$

| Radiation Pattern | Color | Peak Wavelength λ_P | | | Total included Angle (degrees) | Viewing Angle (degrees) |
|-------------------|-------|-----------------------------|--------|--------|--------------------------------|-------------------------|
| | | Min. | Typ. | Max. | $\theta_{0.90V}$ | $2\theta_{1/2}$ |
| | | | | | | |
| Lambertian | UV-S | 365 nm | 370 nm | 375 nm | 60 | 30 |
| | UV-M | 380 nm | 385 nm | 390 nm | 60 | 30 |
| | UV | 390 nm | 395 nm | 400 nm | 60 | 30 |
| | UV-L | 400 nm | 405 nm | 410 nm | 60 | 30 |

- ProLight maintains a tolerance of $\pm 3\text{nm}$ for dominant wavelength measurements.

Absolute Maximum Ratings

| Parameter | UV-S | UV-M/UV/UV-L |
|--|---|--------------|
| DC Forward Current (mA) | 1000 | 1500 |
| Peak Pulsed Forward Current (mA) | 1650 (less than 1/10 duty cycle@1KHz) | |
| ESD Sensitivity (HBM per MIL-STD-883E Method 3015.7) | ±4000V | |
| LED Junction Temperature | 125°C | |
| Operating Board Temperature at Maximum DC Forward Current | -40°C - 85°C | |
| Storage Temperature | -40°C - 100°C | |
| Soldering Temperature | JEDEC 020c 260°C | |
| Allowable Reflow Cycles | 3 | |
| Reverse Voltage | Not designed to be driven in reverse bias | |

Radiometric Power Bin Structure at 700mA

| Color | Bin Code | Minimum Radiometric Power (mW) | Maximum Radiometric Power (mW) | Available Color Bins |
|-------|----------|--------------------------------|--------------------------------|----------------------|
| UV-S | T2 | 755 | 830 | All |
| | U1 | 830 | 910 | 【1】 |
| | U2 | 910 | 1000 | 【1】 |
| | V1 | 1000 | 1100 | 【1】 |
| UV-M | U2 | 910 | 1000 | All |
| | V1 | 1000 | 1100 | 【1】 |
| | V2 | 1100 | 1210 | 【1】 |
| | W1 | 1210 | 1330 | 【1】 |
| | W2 | 1330 | 1460 | 【1】 |
| UV | U2 | 910 | 1000 | All |
| | V1 | 1000 | 1100 | 【1】 |
| | V2 | 1100 | 1210 | 【1】 |
| | W1 | 1210 | 1330 | 【1】 |
| | W2 | 1330 | 1460 | 【1】 |
| UV-L | U2 | 910 | 1000 | All |
| | V1 | 1000 | 1100 | 【1】 |
| | V2 | 1100 | 1210 | 【1】 |
| | W1 | 1210 | 1330 | 【1】 |
| | W2 | 1330 | 1460 | 【1】 |

- ProLight maintains a tolerance of $\pm 10\%$ on flux and power measurements.
- The flux bin of the product may be modified for improvement without notice.
- 【1】 The rest of color bins are not 100% ready for order currently. Please ask for quote and order possibility.

Peak Wavelength Bin Structure

| Color | Bin Code | Minimum Peak Wavelength (nm) | Maximum Peak Wavelength (nm) |
|-------|----------|------------------------------|------------------------------|
| UV-S | 2 | 365 | 370 |
| | 3 | 370 | 375 |
| UV-M | B | 380 | 385 |
| | A | 385 | 390 |
| UV | 1 | 390 | 395 |
| | 2 | 395 | 400 |
| UV-L | 3 | 400 | 405 |
| | 4 | 405 | 410 |

- ProLight maintains a tolerance of $\pm 3\text{nm}$ for peak wavelength measurements.

Forward Voltage Bin Structure


| Color | Bin Code | Minimum Voltage (V) | Maximum Voltage (V) |
|-------|----------|---------------------|---------------------|
| UV-S | E | 3.4 | 3.6 |
| | F | 3.6 | 3.8 |
| | G | 3.8 | 4.0 |
| UV-M | D | 3.2 | 3.4 |
| | E | 3.4 | 3.6 |
| | F | 3.6 | 3.8 |
| | G | 3.8 | 4.0 |
| UV | D | 3.2 | 3.4 |
| | E | 3.4 | 3.6 |
| | F | 3.6 | 3.8 |
| | G | 3.8 | 4.0 |
| UV-L | D | 3.2 | 3.4 |
| | E | 3.4 | 3.6 |
| | F | 3.6 | 3.8 |
| | G | 3.8 | 4.0 |

- ProLight maintains a tolerance of $\pm 0.1\text{V}$ for Voltage measurements.

Note: Although several bins are outlined, product availability in a particular bin varies by production run and by product performance. Not all bins are available in all colors.


Color Spectrum, $T_J = 25^\circ\text{C}$

1. UV-S, UV-M, UV, UV-L

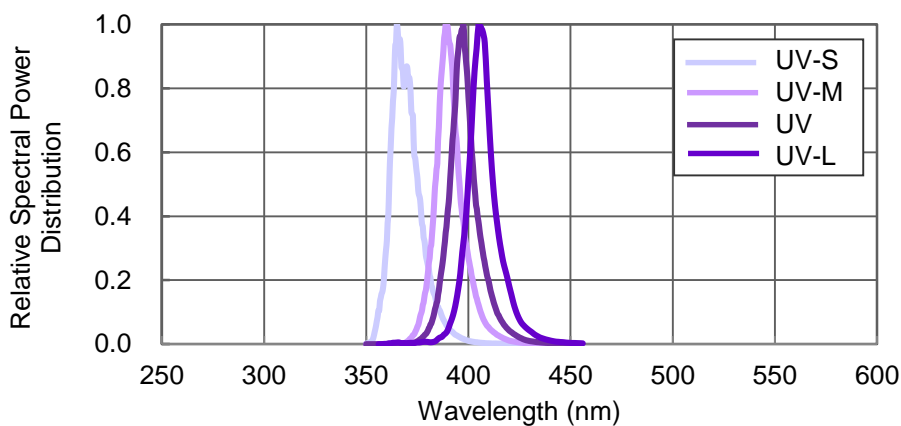



Light Output Characteristics

Relative Light Output vs. Junction Temperature at 700mA


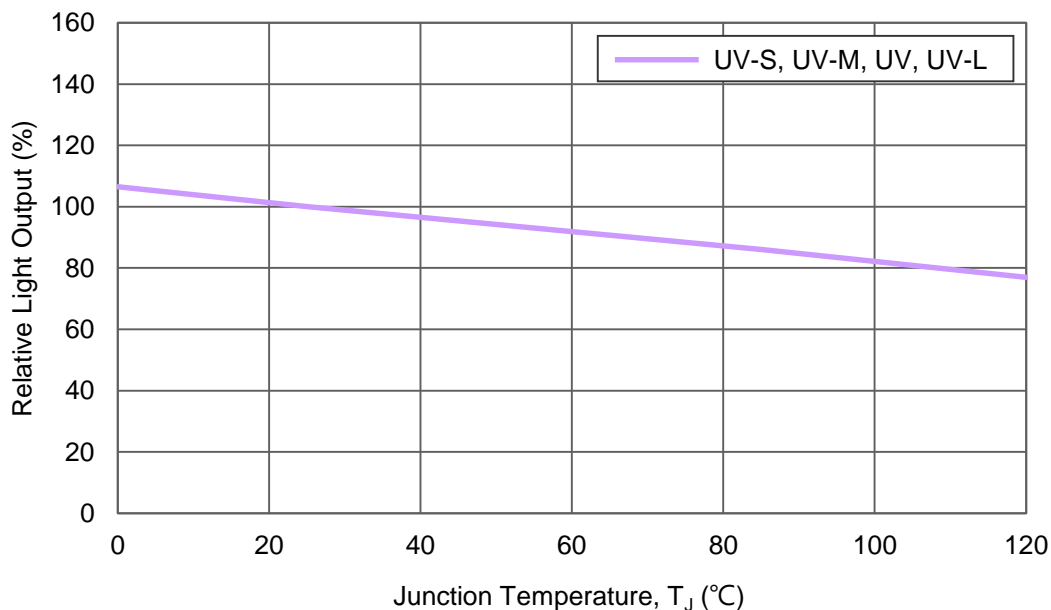


Forward Current Characteristics, $T_j = 25^\circ\text{C}$

1. Forward Voltage vs. Forward Current

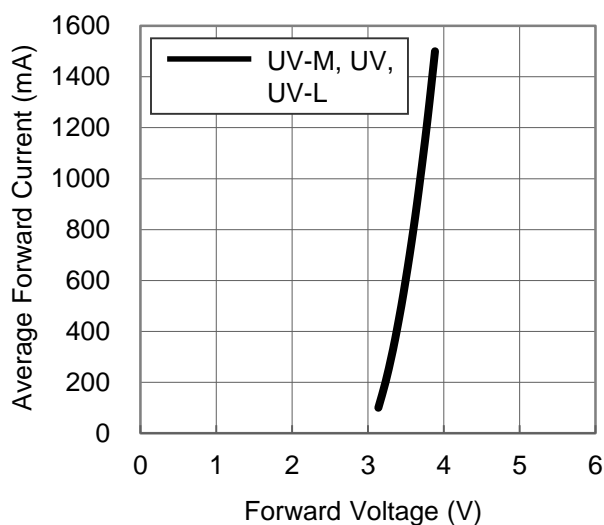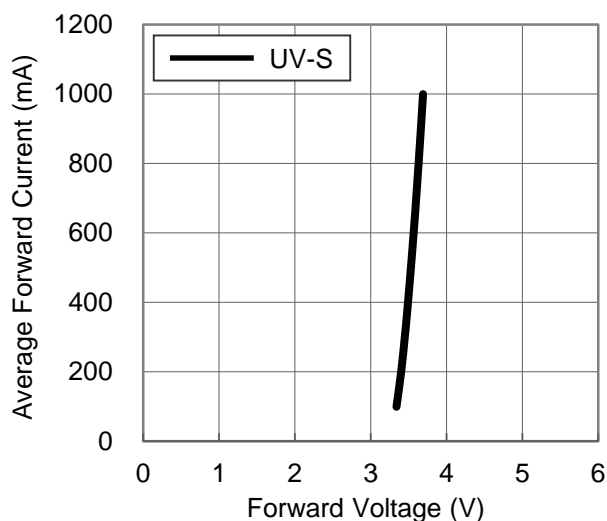


2. Forward Current vs. Normalized Relative Luminous Flux

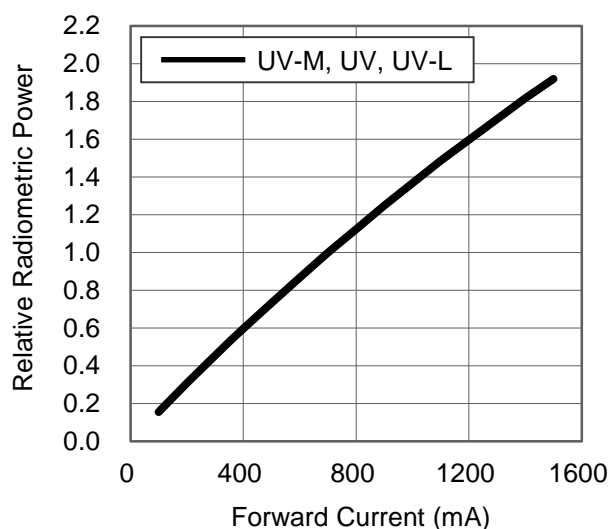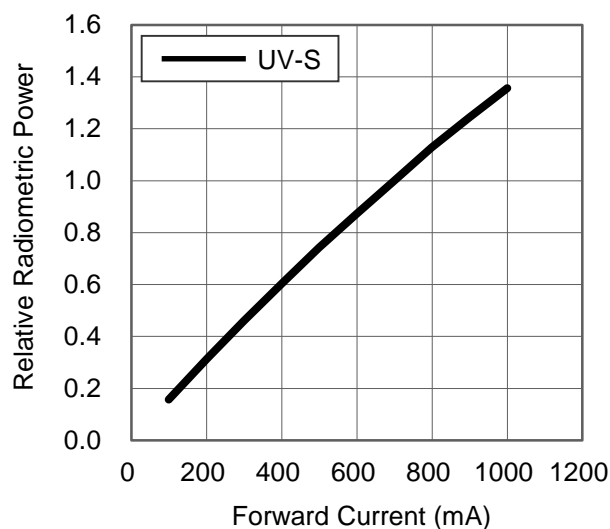


Solder Temperature (Slug) vs. Maximum Forward Current


1. UV-S ($T_{JMAX} = 125^{\circ}C$)

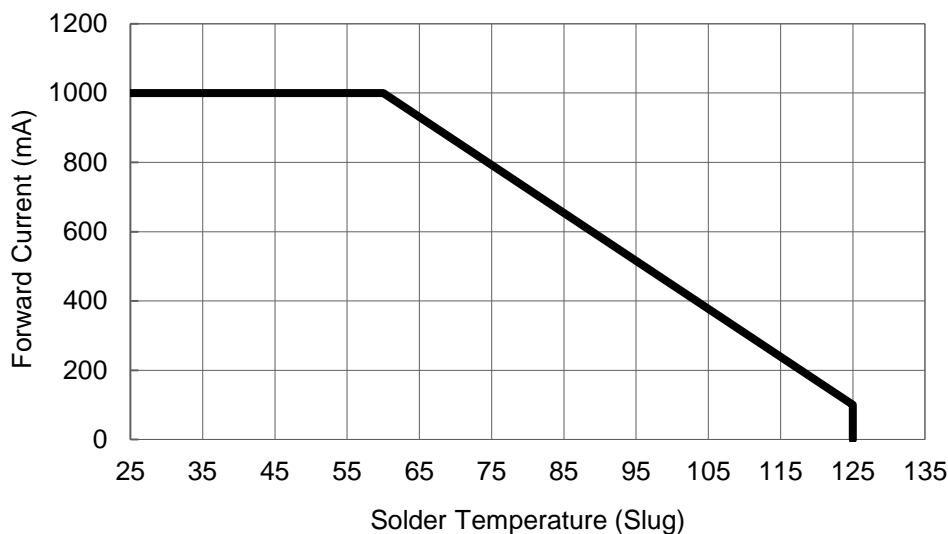

2. UV-M, UV, UV-L ($T_{JMAX} = 125^{\circ}C$)

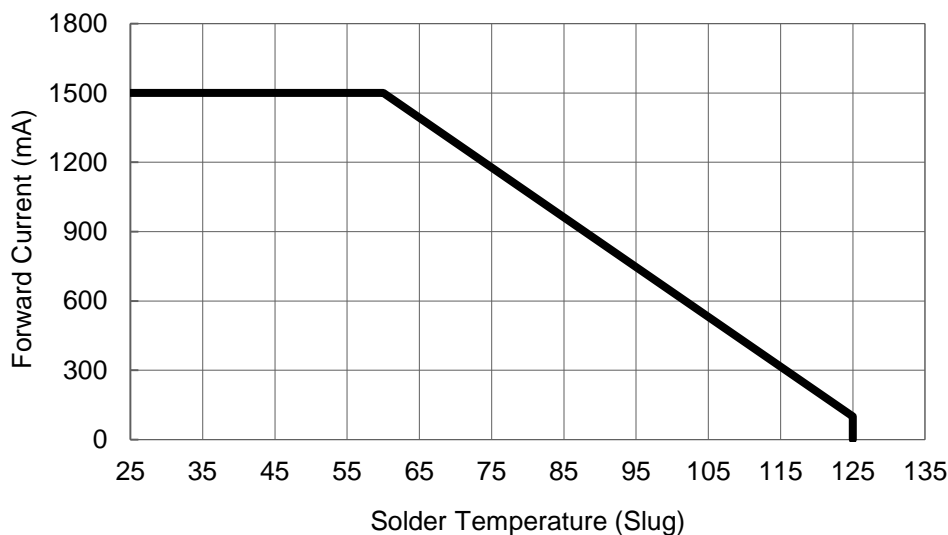

Typical Representative Spatial Radiation Pattern

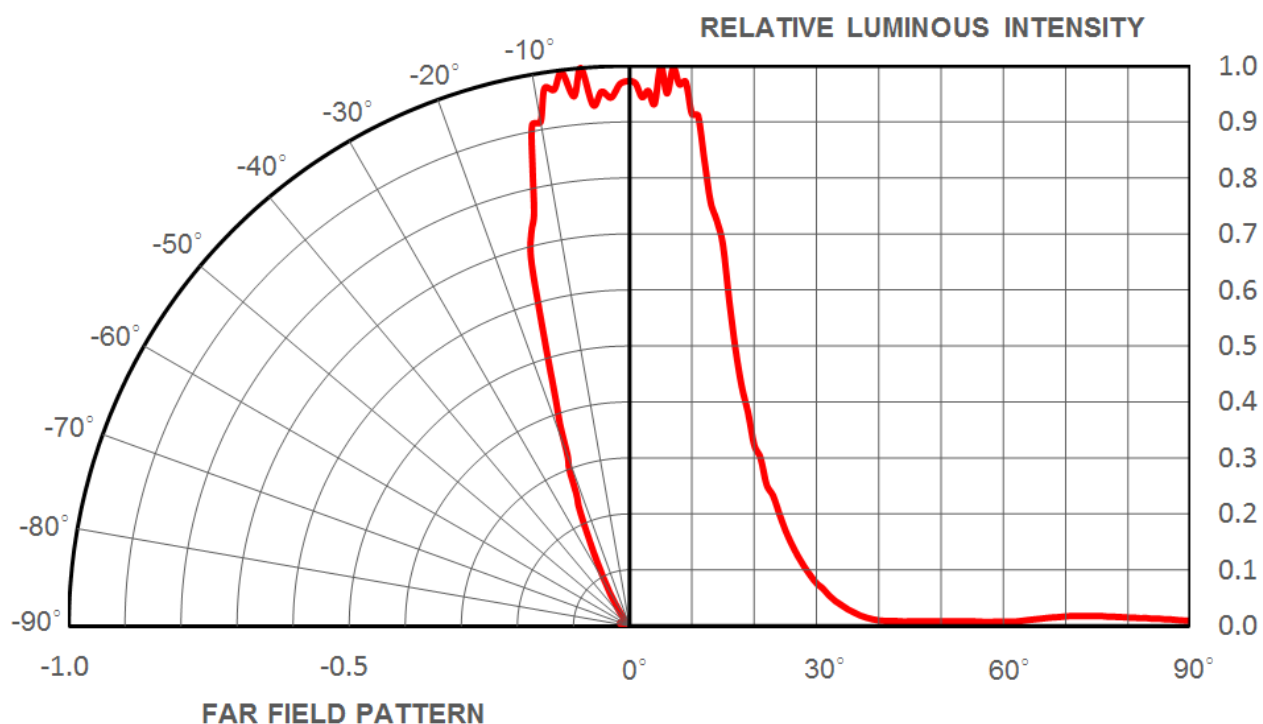

Moisture Sensitivity Level - JEDEC Level 1

| Level | Floor Life | | Soak Requirements | | | |
|-------|------------|---------------------------------------|-------------------|----------------------------------|-------------------------|------------|
| | | | Standard | | Accelerated Environment | |
| | Time | Conditions | Time (hours) | Conditions | Time (hours) | Conditions |
| 1 | Unlimited | $\leq 30^{\circ}\text{C}$ / 85% RH | 168 +5/-0 | 85°C / 85% RH | NA | NA |

- The standard soak time includes a default value of 24 hours for semiconductor manufacture's exposure time (MET) between bake and bag and includes the maximum time allowed out of the bag at the distributor's facility.
- Table below presents the moisture sensitivity level definitions per IPC/JEDEC's J-STD-020C.

| Level | Floor Life | | Soak Requirements | | | |
|-------|------------------------|---------------------------------------|------------------------|----------------------------------|-------------------------|----------------------------------|
| | | | Standard | | Accelerated Environment | |
| | Time | Conditions | Time (hours) | Conditions | Time (hours) | Conditions |
| 1 | Unlimited | $\leq 30^{\circ}\text{C}$ / 85% RH | 168 +5/-0 | 85°C / 85% RH | NA | NA |
| 2 | 1 year | $\leq 30^{\circ}\text{C}$ / 60% RH | 168 +5/-0 | 85°C / 60% RH | NA | NA |
| 2a | 4 weeks | $\leq 30^{\circ}\text{C}$ / 60% RH | 696 +5/-0 | 30°C / 60% RH | 120 +1/-0 | 60°C / 60% RH |
| 3 | 168 hours | $\leq 30^{\circ}\text{C}$ / 60% RH | 192 +5/-0 | 30°C / 60% RH | 40 +1/-0 | 60°C / 60% RH |
| 4 | 72 hours | $\leq 30^{\circ}\text{C}$ / 60% RH | 96 +2/-0 | 30°C / 60% RH | 20 +0.5/-0 | 60°C / 60% RH |
| 5 | 48 hours | $\leq 30^{\circ}\text{C}$ / 60% RH | 72 +2/-0 | 30°C / 60% RH | 15 +0.5/-0 | 60°C / 60% RH |
| 5a | 24 hours | $\leq 30^{\circ}\text{C}$ / 60% RH | 48 +2/-0 | 30°C / 60% RH | 10 +0.5/-0 | 60°C / 60% RH |
| 6 | Time on Label (TOL) | $\leq 30^{\circ}\text{C}$ / 60% RH | Time on Label (TOL) | 30°C / 60% RH | NA | NA |

Qualification Reliability Testing

| Stress Test | Stress Conditions | Stress Duration | Failure Criteria |
|--|--|-----------------|----------------------------|
| Room Temperature Operating Life (RTOL) | 25°C, I_F = max DC (Note 1) | 1000 hours | Note 2 |
| High Temperature Storage Life (HTSL) | 100°C, non-operating | 1000 hours | Note 2 |
| Low Temperature Storage Life (LTSL) | -40°C, non-operating | 1000 hours | Note 2 |
| Non-operating Temperature Cycle (TMCL) | -40°C to 100°C, 30 min. dwell, <5 min. transfer | 200 cycles | Note 2 |
| Mechanical Shock | 1500 G, 0.5 msec. pulse, 5 shocks each 6 axis | | Note 3 |
| Natural Drop | On concrete from 1.2 m, 3X | | Note 3 |
| Variable Vibration Frequency | 10-2000-10 Hz, log or linear sweep rate, 20 G about 1 min., 1.5 mm, 3X/axis | | Note 3 |
| Solder Heat Resistance (SHR) | 260°C \pm 5°C, 10 sec. | | Note 3 |
| Solderability | Steam age for 16 hrs., then solder dip at 260°C for 5 sec. | | Solder coverage on lead |

Notes:

1. Depending on the maximum derating curve.
2. Criteria for judging failure

| Item | Test Condition | Criteria for Judgement | |
|---|----------------|------------------------|---------------------|
| | | Min. | Max. |
| Forward Voltage (V_F) | I_F = max DC | -- | Initial Level x 1.1 |
| Luminous Flux or Radiometric Power (Φ_V) | I_F = max DC | Initial Level x 0.7 | -- |


* The test is performed after the LED is cooled down to the room temperature.

3. A failure is an LED that is open or shorted.


Recommended Solder Pad Design

Standard Emitter

TYPE A.

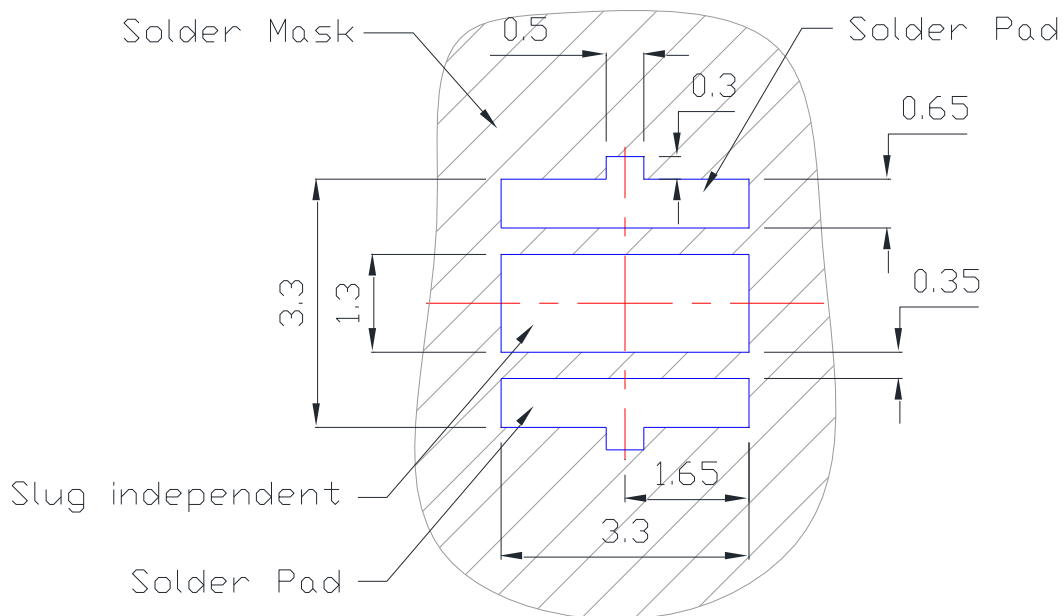


TYPE B.

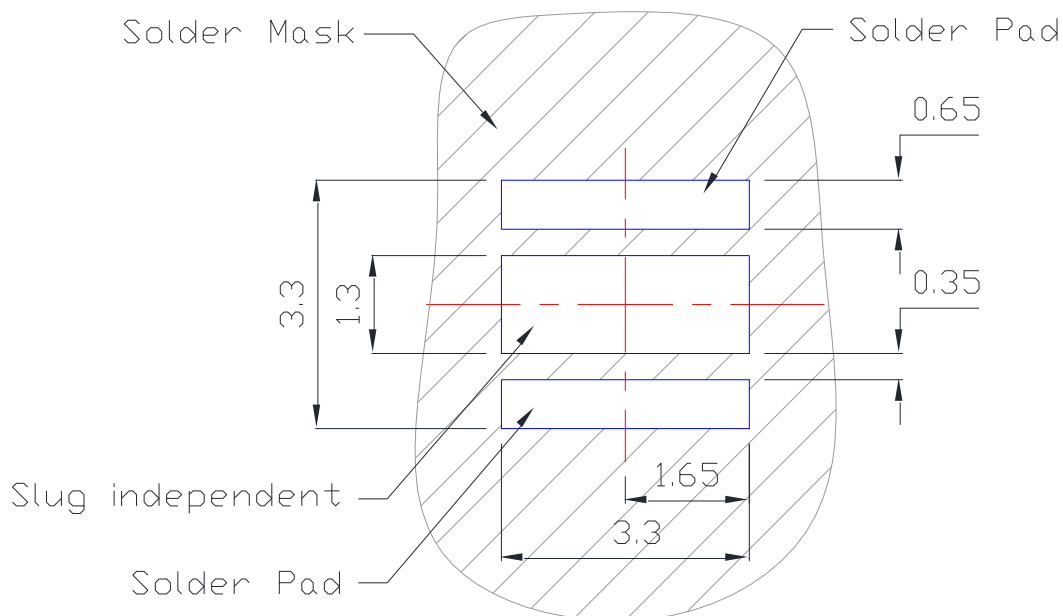

- All dimensions are in millimeters.
- Electrical isolation is required between Slug and Solder Pad.


Reflow Soldering Condition

| Profile Feature | Sn-Pb Eutectic Assembly | Pb-Free Assembly |
|---|----------------------------------|----------------------------------|
| Average Ramp-Up Rate (T_{Smax} to T_p) | 3°C / second max. | 3°C / second max. |
| Preheat <ul style="list-style-type: none"> – Temperature Min (T_{Smin}) – Temperature Max (T_{Smax}) – Time (t_{Smin} to t_{Smax}) | 100°C 150°C 60-120 seconds | 150°C 200°C 60-180 seconds |
| Time maintained above: <ul style="list-style-type: none"> – Temperature (T_L) – Time (t_L) | 183°C 60-150 seconds | 217°C 60-150 seconds |
| Peak/Classification Temperature (T_p) | 240°C | 260°C |
| Time Within 5°C of Actual Peak Temperature (t_p) | 10-30 seconds | 20-40 seconds |
| Ramp-Down Rate | 6°C/second max. | 6°C/second max. |
| Time 25°C to Peak Temperature | 6 minutes max. | 8 minutes max. |

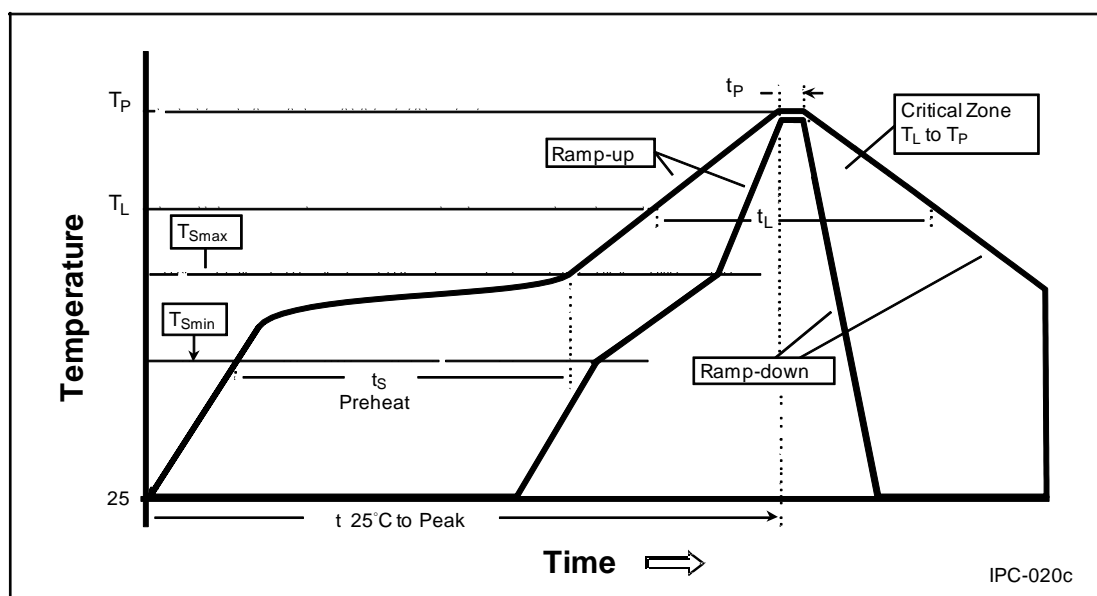

- We recommend using the M705-S101-S4 solder paste from SMIC (Senju Metal Industry Co., Ltd.) for lead-free soldering.
- Do not use solder pastes with post reflow flux residue>47%. (58Bi-42Sn eutectic alloy, etc) This kind of solder pastes may cause a reliability problem to LED.
- All temperatures refer to topside of the package, measured on the package body surface.
- Repairing should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used. It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.
- Reflow soldering should not be done more than three times.
- When soldering, do not put stress on the LEDs during heating.
- After soldering, do not warp the circuit board.


Emitter Reel Packaging

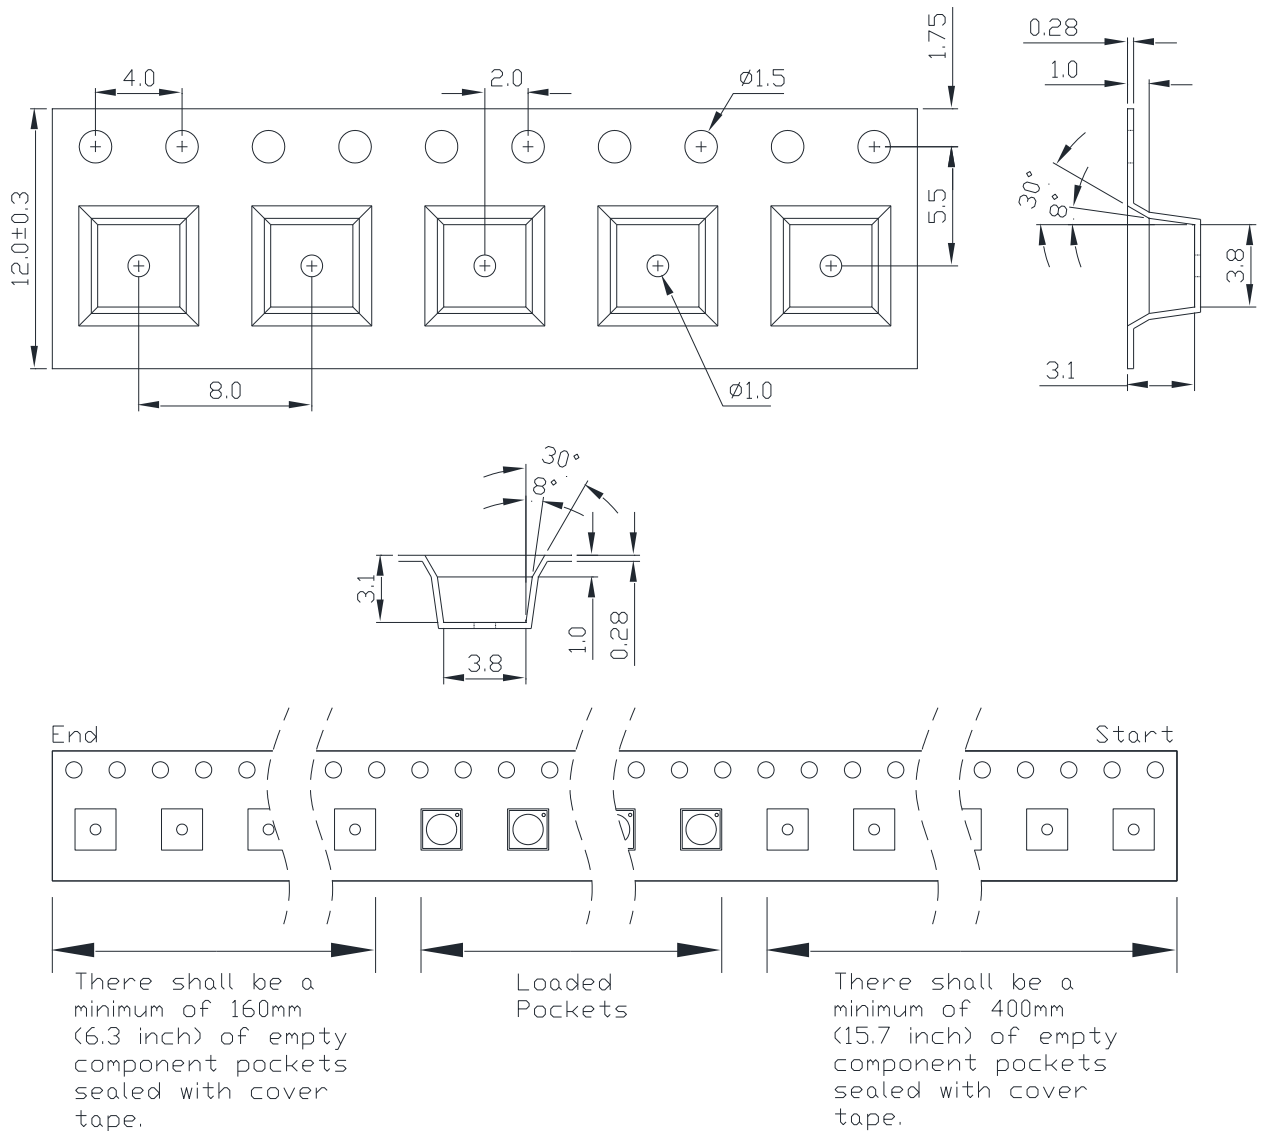

Notes:

1. Drawing not to scale.
2. All dimensions are in millimeters.
3. Unless otherwise indicated, tolerances are ± 0.10 mm.

Emitter Reel Packaging

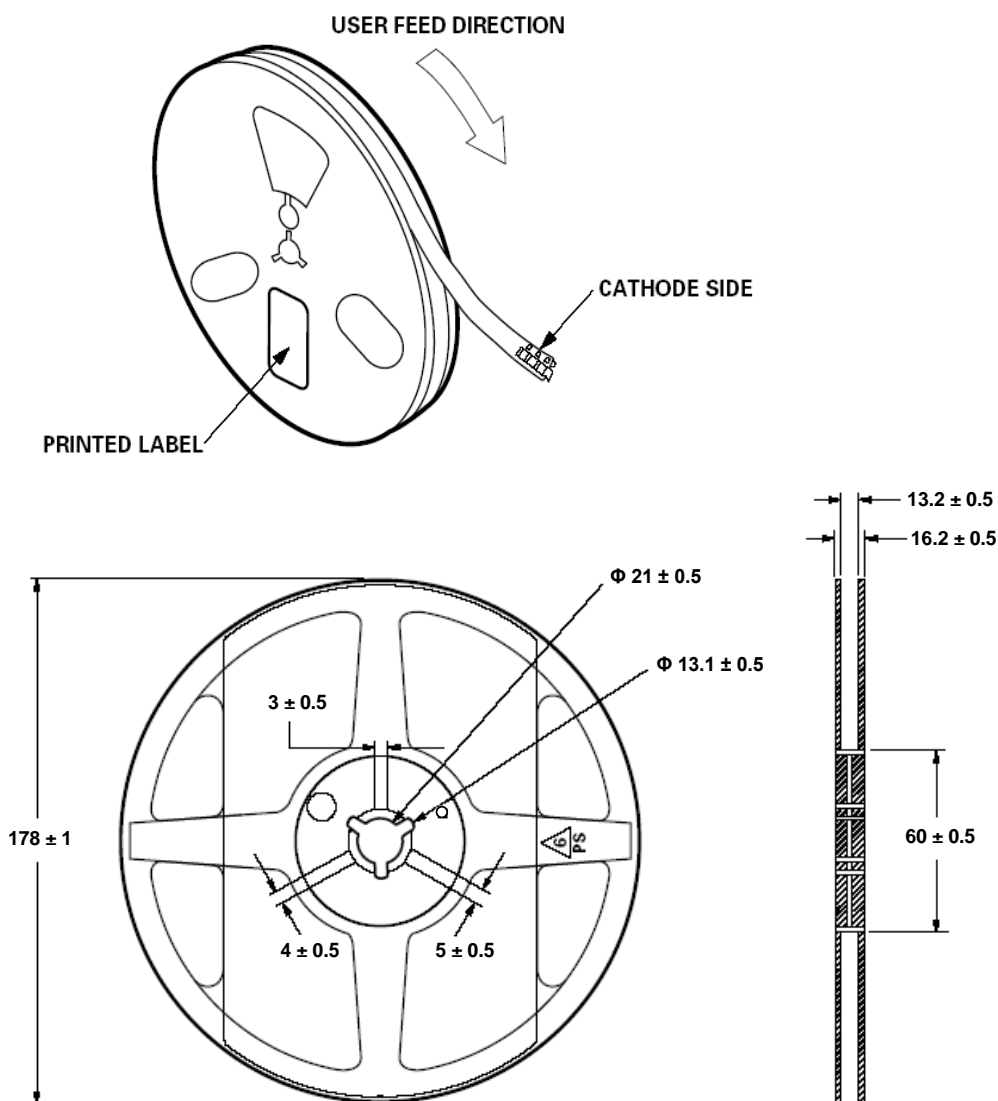

Notes:


1. Empty component pockets sealed with top cover tape.
2. 250, 500 pieces per reel.
3. Drawing not to scale.
4. All dimensions are in millimeters.

Precaution for Use

- **Storage**
Please do not open the moisture barrier bag (MBB) more than one week. This may cause the leads of LED discoloration. We recommend storing ProLight's LEDs in a dry box after opening the MBB. The recommended storage conditions are temperature 5 to 30°C and humidity less than 40% RH. It is also recommended to return the LEDs to the MBB and to reseal the MBB.
- LEDs are ESD (electrostatic discharge) sensitive; static electricity and surge voltages seriously damage UV LEDs and can result in product failure
 - (1) Ensure that tools, jigs and machines being used are properly grounded
 - (2) LED mounting equipment should include protection against voltage surge
 - (3) Use proper ESD protection, including grounded wrist straps, ESD footwear and clothes
- The slug is not electrically neutral. Therefore, we recommend to isolate the heat sink.
- **We recommend using the M705-S101-S4 solder paste from SMIC (Senju Metal Industry Co., Ltd.) for lead-free soldering.**
- **Do not use solder pastes with post reflow flux residue > 47%. (58Bi-42Sn eutectic alloy, etc) This kind of solder pastes may cause a reliability problem to LED.**
- Any mechanical force or any excess vibration shall not be accepted to apply during cooling process to normal temperature after soldering.
- Please avoid rapid cooling after soldering.
- Components should not be mounted on warped direction of PCB.
- Repairing should not be done after the LEDs have been soldered. When repairing is unavoidable, a heat plate should be used. It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.
- This device should not be used in any type of fluid such as water, oil, organic solvent and etc. When cleaning is required, isopropyl alcohol should be used.
- When the LEDs are illuminating, operating current should be decided after considering the package maximum temperature.
- The appearance, specifications and flux bin of the product may be modified for improvement without notice. Please refer to the below website for the latest datasheets.
<http://www.prolightopto.com/>

Eye Safety Guidelines



- During operation, the LED emits high intensity ultraviolet (UV) light, which is harmful to skin and eyes. UV light is hazardous to skin and may cause cancer. Avoid exposure to UV light when LED is operational. Precautions must be taken to avoid looking directly at the UV light without the use of UV light protective glasses. Do not look directly at the front of the LED or at the LED's lens when LED is operational.
- Attach warning labels on products/systems that use UV LEDs.

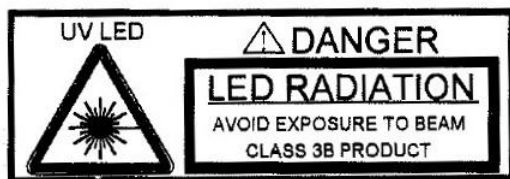

Use Handling of Quartz Lens LEDs

Notes for handling of quartz lens LEDs

- Please do not use a force of over 3kgf impact or pressure on the quartz lens, otherwise it will cause a catastrophic failure.
- The LEDs should only be picked up by making contact with the sides of the LED body.
- Avoid touching the quartz lens especially by sharp tools such as Tweezers.
- Avoid leaving fingerprints on the quartz lens.
- Please store the LEDs away from dusty areas or seal the product against dust.
- When populating boards in SMT production, there are basically no restrictions regarding the form of the pick and place nozzle, except that mechanical pressure on the quartz lens must be prevented.
- Please do not mold over the quartz lens with another resin. (epoxy, urethane, etc)



DISCLAIMER

- The information in this document has been compiled from reference materials and other sources believed to be reliable, and given in good faith. No warranty, either expressed or implied, is made, however, to the accuracy and completeness of the information, nor is any responsibility assumed or implied for any loss or damage resulting from inaccuracies or omissions. Each user bears full responsibility for making their own determination as to the suitability of Prolight products, recommendations or advice for its own particular use. Prolight makes no warranty or guarantee, express or implied, as to results obtained in end-use, nor of any design incorporating its Products, recommendation or advice.
- Each user must identify and perform all tests and analyses necessary to ensure that its finished application incorporating Prolight products will be safe and suitable for use under end-use conditions. Each user of devices assumes full responsibility to become educated in and to protect from harmful irradiation. Prolight specifically disclaims any and all liability for harm arising from buyer's use or misuse of UVC devices either in development or end-use.